

Introducing the Smart-C

Experience the power of portability



The C-arm you don't have to make room for

Open up your OR with a mini C-arm that is actually mini and provides the functionality of current models in the market today. Our creative design provides today's clinicians with flexible options to build C-arm solution that fits their workspace and imaging needs.

The Turner Imaging Systems Smart-C is a mini C-arm X-ray system designed to provide physicians with realtime general fluoroscopic visualization of adult and pediatric patients. It is intended to aid physicians and surgeons during diagnostic procedures, therapeutic treatment or surgical procedures of the limbs, extremities or shoulders, including, but not limited to, orthopedics and emergency medicine. The Smart-C is intended to be used on a table or other hard, flat surface. It may also be used with the optional support stand. Follow IFU Safeguards.

The Smart-C[®] is designed with the following features:

- Lightweight, cordless, battery-powered system for true portability
- Sophisticated imaging algorithm for improved visualization
- Wireless, high-definition fluoroscopic imaging for radiological use
- Independent articulating arm for optimal positioning
- Ability to conserve space with a compact footprint
- Independent monitor cart that allows for clear field-of-view positioning
- Ability to detach from the articulating arm for independent, tabletop use
- siemens-healthineers.us/smart-c




Solutions Partner



Full capability. True portability.

Battery pack is integrated into the slim profile for cordless operation and true portability

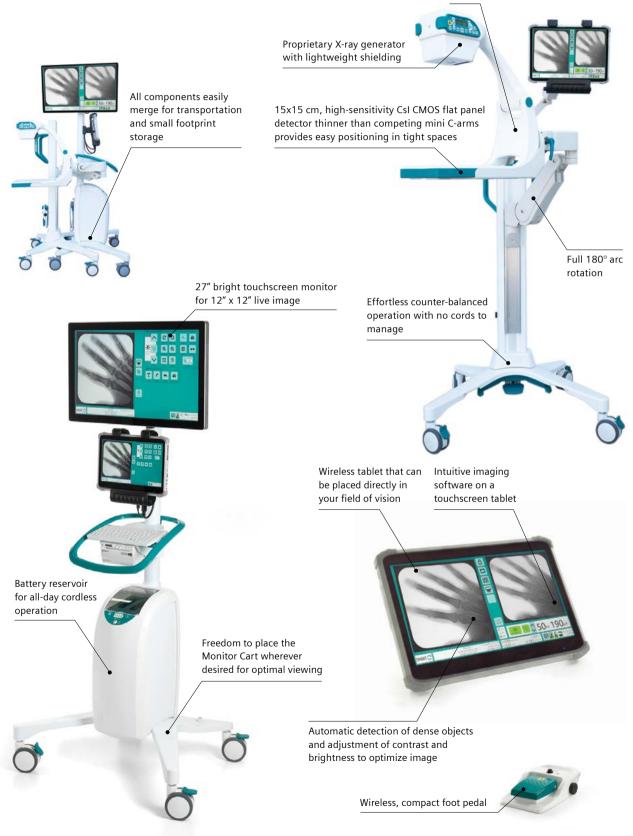

Smart-C technical specifications

DICOM 3.0-compliant and secure via wireless encryption

Smart-C

Image Receptor	Csl scintillator on Complementary Metal
	Oxide Semiconductor (CMOS)
Image Receptor Pixel Array	1.5k x 1.5k
Image Receptor Pixel Size	~99 µm
Field of View	Primary collimation: 15 x 15 cm (6 x 6 in)
	Secondary collimation: 10 cm (4 in) diameter
Tube Voltage Range	40 to 80 kVp
Tube Current Range	130 to 370 μA
Pulse Rate	10 pulses per second
Focal Spot	0.04 mm nominal
Tablet Screen	34 cm (13.3 in) diagonal
	1920 x 1080 resolution; Touchscreen
Live Image	15 cm x 15 cm (6 in x 6 in)
Water Ingress	C-arm: IPX3 (spraying water)
	Tablet: IPX0 (not specified)
	Footswitch: IPX8 (immersion)
Source to Detector Distance (SDD)	45 cm (17.7 in)
Minimum Source to Skin Distance (SSD)	10 cm (4.0 in)
C-Arm Free Space (Functional SSD)	34 cm (13.4 in)
C-Arm Depth of Arc	31 cm (12.2 in)
Networking	DICOM 3.0 compliant
Wireless Security	WPA2 encryption
Weights	C-arm and battery: 7.2 kg (16.0 lb)
	Tablet: 1.5 kg (3.3 lb)
	Footswitch: 0.7 kg (1.5 lb)

Monitor Cart

27 in diagonal; 1920 x 1080 resolution Touchscreen; 725 Cd/m2
-
33 x 33 cm (13 x 13 in)
Thermal, medical grade
Battery operation (>8 hrs) or 115 VAC
2
Waterproof
65 kg (143 lb)

Support Stand

Height Adjustment Range	61 to 144 cm (24 to 57 in)
Reach	116 cm (46 in)
Horizontal Travel	218 cm (86 in)
Orbital Arc Rotation	Counterbalanced 180°
Wrist Spin Rotation	Unlimited
Weight	75 kg (165 lb)

To learn more about the Smart-C, contact 🔀 accessorysolutions@siemens-healthineers.com

Siemens Healthineers AG (listed in Frankfurt, Germany: SHL) pioneers breakthroughs in healthcare. For everyone. Everywhere. As a leading medical technology company headquartered in Erlangen, Germany, Siemens Healthineers and its regional companies is continuously developing its product and service portfolio, with Al-supported applications and digital offerings that play an increasingly important role in the next generation of medical technology. These new applications will enhance the company's foundation in in-vitro diagnostics, image-guided therapy, in-vivo diagnostics, and innovative cancer care.

Siemens Healthineers also provides a range of services and solutions to enhance healthcare providers' ability to provide high-quality, efficient care. In fiscal 2021, which ended on September 30, 2021, Siemens Healthineers, which has approximately 66,000 employees worldwide, generated revenue of \in 18.0 billion and adjusted EBIT of \in 3.1 billion.

Further information is available at www.siemens-healthineers.com.

The outcomes and statements provided by customers of Siemens Healthineers are unique to each customer's setting. Since there is no "typical" hospital and many variables exist (e.g., hospital size, case mix, and level of service/technology adoption), there can be no guarantee that others will achieve the same results.

On account of certain regional limitations of sales rights and service availability, we cannot guarantee that all products included in this brochure are available through the Siemens Healthineers sales organization worldwide. Availability and packaging may vary by country and is subject to change without prior notice. Some/All of the features and products described herein may not be available in the United States.

The information in this document contains general technical descriptions of specifications and options as well as standard and optional features, which do not always have to be present in individual cases.

Siemens Healthineers reserves the right to modify the design, packaging, specifications, and options described herein without prior notice. For the most current information, please contact your local sales representative from Siemens Healthineers.

Note: Any technical data contained in this document may vary within defined tolerances. Original images always lose a certain amount of detail when reproduced.

Siemens Healthineers Headquarters Siemens Healthcare GmbH Henkestr. 127 91052 Erlangen, Germany siemens-healthineers.com **Legal Manufacturer** Turner Imaging Systems Inc. 1119 S 1680 W Orem, UT 84058

for the Product Smart-C **Distributed by** Siemens Medical Solutions USA, Inc. Healthcare 40 Liberty Boulevard Malvern, PA 19355-9998, USA

siemens-healthineers.us